




Ritec ClearShield® Durable 'Non-Stick'
Easy-Clean Glass Surface Protection



NEW! ClearPad™ VPIR-200

vertical pad Ritec ClearShield® application with IR pre-heating

PROCESS FASTER • LESS LABOUR • INCREASE PROFIT

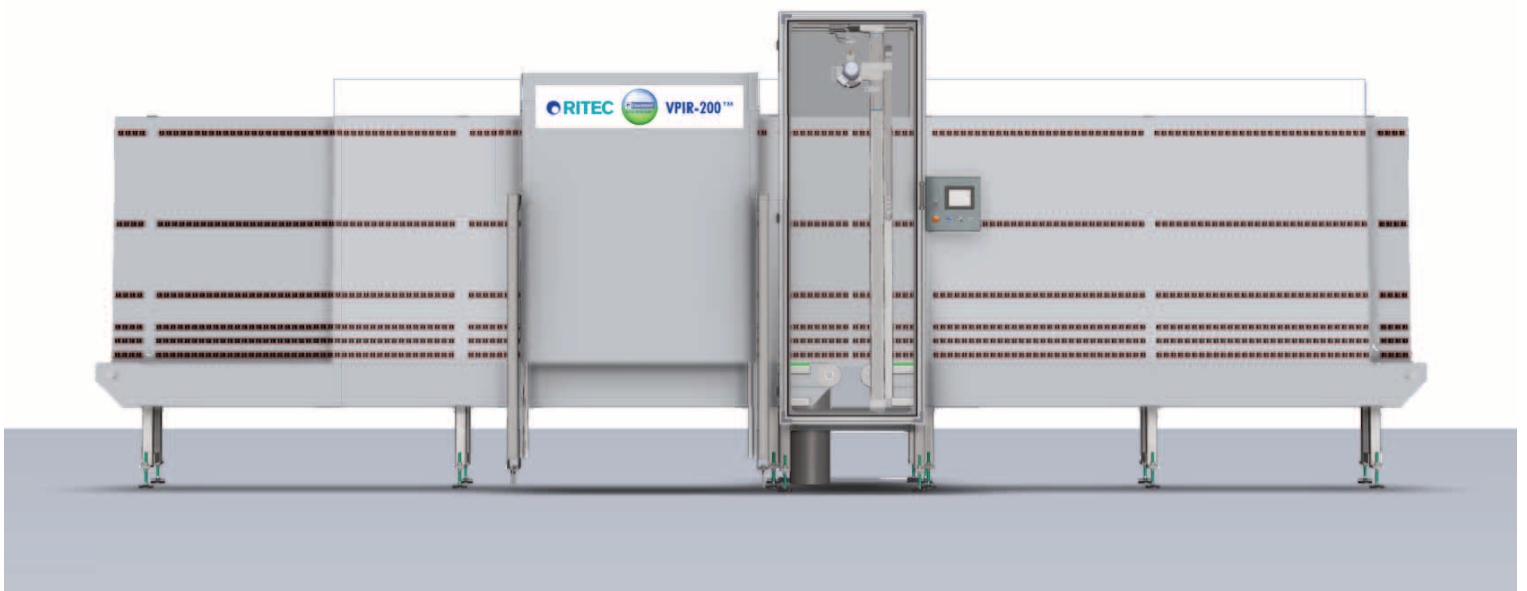

- The most efficient way of pad-applying Ritec ClearShield®
- Reduces handling, labour costs and application training
- Faster production with IR pre-heating for instant curing
- Increased and consistent coverage rate
- Management and control software to maximise product usage and avoid waste
- Small footprint

TECHNICAL SPECIFICATIONS

Model:	ClearPad™ VPIR-200
Construction:	Powder coated mild steel frame
Power Consumption:	10kW
Voltage:	380 - 415V
Footprint:	Width 7280mm Height 2505mm Depth 838mm
Rate per Hour (linear):	120 linear metres
Rate per Hour (area):	192m ²
Minimum Glass Size:	Width 500mm Height 200mm Thickness 2mm
Maximum Glass Size:	Width 2500mm Height 1600mm Thickness 28mm
Actuator:	Linear

All specifications correct at time of printing (October 2022). Ritec Services reserve the right to change or modify specifications and / or parts without prior notice.

For more information, contact:

Ritec Services

Forellenweg 1b, 4941 SJ Raamsdonksveer, The Netherlands
T: +31 (0) 162 52 33 55
info@ritecservices.nl
www.ritecservices.nl